



GO THE DISTANCE.

The Holland Group, Inc.





TRUCK MASTER[®]



GO THE DISTANCE.



Liftgate History

Truck Master Philosophy

General Design Features

DH45 Series

DH 55 & DH66 Series





Liftgate History

Truck Master liftgate production began at the Holland Equipment facility in 1981 with one 2200 lbs. model. Currently there are over 40 models ranging from traditional fold-away models to conventional railgates and including the advanced direct hydraulic lift. Truck Master offers lift capacities from 2500 lbs. to 6600 lbs. And platform sizes from 36" to 84" with the widest (88") platform in the industry.



Holland Truck Master Philosophy

Holland's commitment to you is to produce and provide reliable, dependable, and the highest quality liftgates. We achieve this through the design of a user-friendly product with low maintenance requirements that is easy to service and provides the "lowest cost per mile" and the "highest up-time".

From Sales to Service, Design to Assembly, Holland has personnel familiar with current manufacturing methods and the latest design software. People who are up-to-date with today's demanding applications and the changing market. Personnel who provide unsurpassed product knowledge and customer service.

Holland. People and products who...

GO THE DISTANCE.





DH Series





DH Series Standard features

- Power Up/Down, and Power Open/Close hydraulic system
- Self-bleeding hydraulic system
- Maintenance-free roller system made from proprietary polymer bonded to a sealed bearing
- Accurate Level Ride Platform
- Platform leveling and flatness adjustments
- Booted marine grade toggle controls
- Syncoat 2000 hrs. salt spray coating process to reduce corrosion and improve appearance.
- Sealed pump / battery enclosure
- Master Disconnect Switch, 150 amp Circuit Breaker, and 20 amp in-line fuse
- Standard 102“ width, optional 96” wide mounting available
- Hydraulic lock valves
- Sealed side-mount pump-box
- Galvanized Inner rails and Platform Chains
- Shrink-wrapped cable connections
- Deutsche electrical connectors
- Under-ride compliant



DH45 Series


- Capacity: 4500 lbs.
- Power Open/Close, Power Up/Down
- Platform size: 48", 60", 72", 84" x 86", Bi-fold style
- Platform Material: Steel or an Aluminum Hybrid.
- Ramps 12", 16" Aluminum or cart stop
- Single motor hydraulic pump
- Self bleeding hydraulic system





DH55 & DH66 Series

- Capacity: 5500 lbs. & 6600 lbs.
- Power Open/Close, Power Up/Down
- Platform size: 48", 60", 72", 84" x 86", Bi-fold style
- Platform Material: Steel or an Aluminum Hybrid.
- Ramps 12", 16" Aluminum or cart stop
- Dual motor hydraulic pump
- Self bleeding system with Patented leveling system

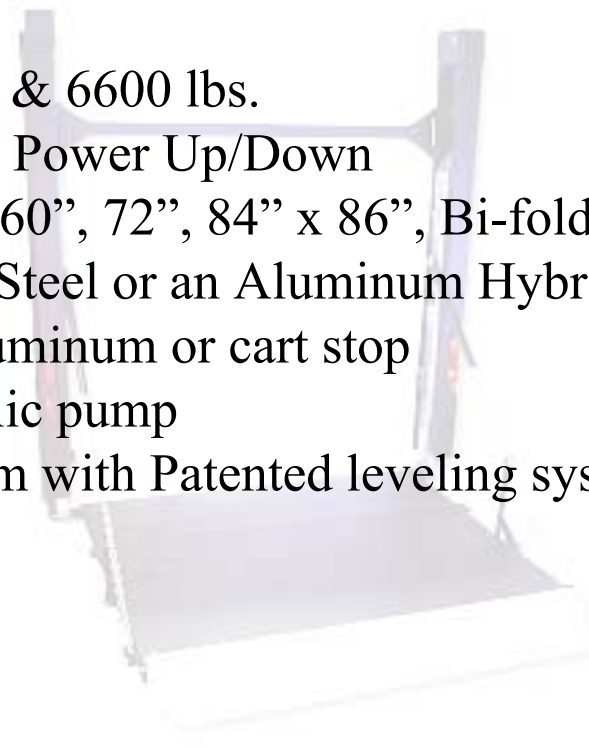




DH Series Hydraulic System

DH5500/6600 only


- Dual pump hydraulic system
- Patented hydraulic system using Flow-Dividing Cylinder
- Most accurate tracking of adjacent hydraulic cylinders in the industry
- Accuracy not affected by off-center loading
- Not affected by low voltage conditions
- Self bleeding system, reducing install, maintenance and service time

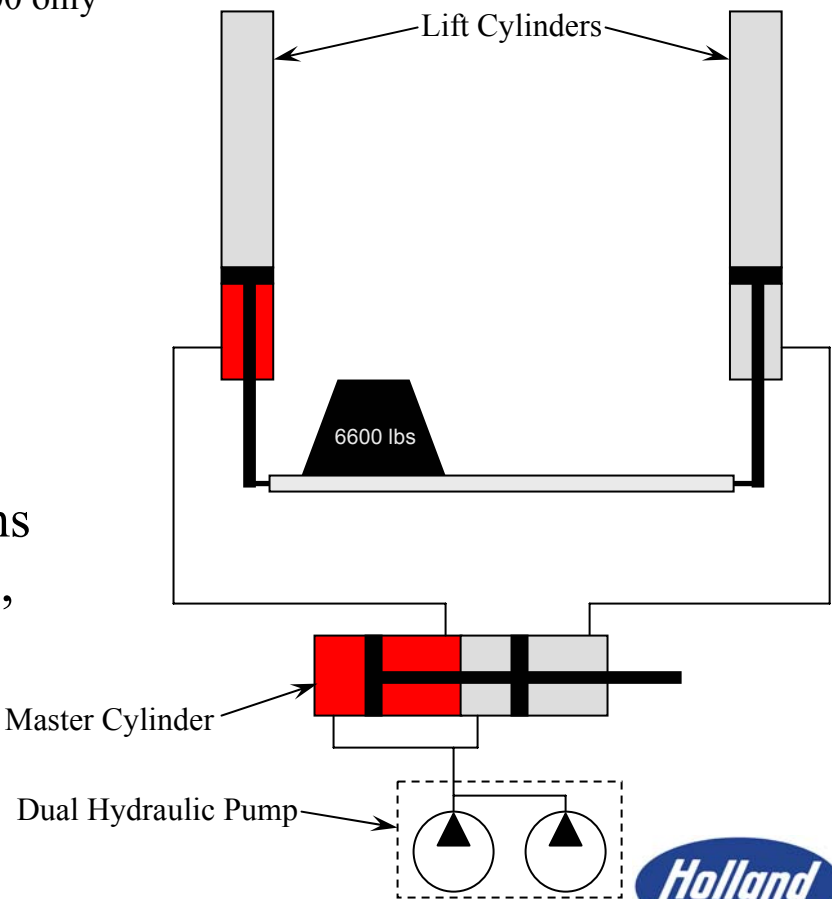



DH Series Proprietary Roller

- Proprietary polymer bonded directly to bearing
- Resilient to shock loading
- Stays flexible to -58°F (50°C)
- Stable properties despite humidity
- Sealed Heavy-Duty Roller Bearing pre-lubed for the life of the roller
- Will not chip, chunk, freeze or sweat like nylon

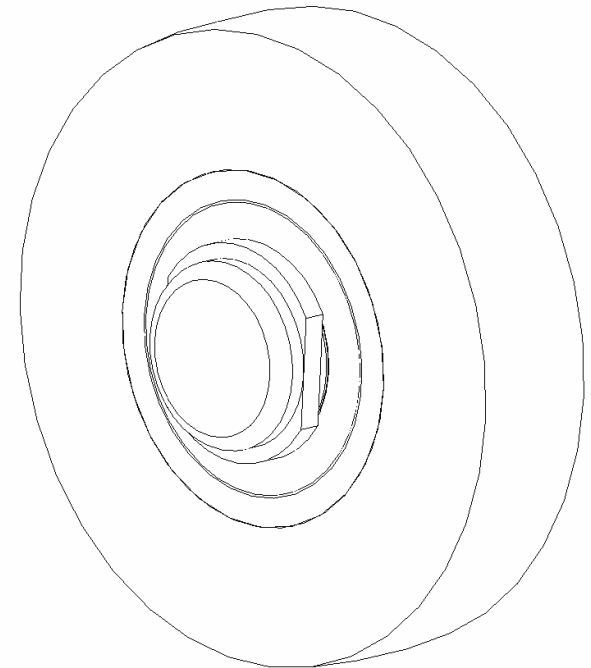



GO THE DISTANCE.



GO THE DISTANCE.