

With up to 31,100 lbs. of off-road payload capacity, ACELA's 6x6 Monterra is the most capable, versatile and reliable wheeled vehicle solution available on the commercial market today, designed specifically to dramatically improve operational capabilities and job site productivity.



Originally designed for the U.S. Army for use in extreme weather and terrain conditions, the Monterra is outfitted with the industry's most dependable components and design features, including drivetrains, frames, axles, suspensions, and tires that were specifically designed to withstand the rigors of the harshest and most extreme terrains, including field combat, surface mining, pipeline construction, emergency response, and oil and gas exploration. For over 22 years, it has achieved the U.S. Army's coveted "ultra-reliability" certification. Simply put, the Monterra consistently outperforms every other wheeled vehicle in its class in virtually every environment.

When fully-loaded, the Monterra boasts a whopping 8-inches more ground clearance than any other truck in its class, providing access to areas other trucks can't operate.

With all Monterra parts commercially available, ACELA's after-sales support is second to none. We're here to support your operation with our world-class technical expertise, and can provide same-day shipping of any part.


If you're ready for a dependable, proven, all-in-one jobsite solution that keeps your operations running smoothly, the ACELA Monterra is the only choice.

Key Features

- Full-Time All-Wheel Drive
- 330HP Caterpillar 7.2L Turbo-Charged Diesel Engine
- Allison Automatic 7-Speed Transmission
- Multiple 4x4 and 6x6 Variants with 90% Parts Commonality
- U.S. Army "Ultra-Reliable" Certification
- 22" Ground Clearance
- Air-Ride Seating

Popular Options

- High-Speed Gearing
- 3-Person Cab
- Back-up Camera
- Back-up Alarm
- Central Tire Inflation System (CTIS)
- Upfitter Switches
- Snow Plow
- Flood Rescue Body

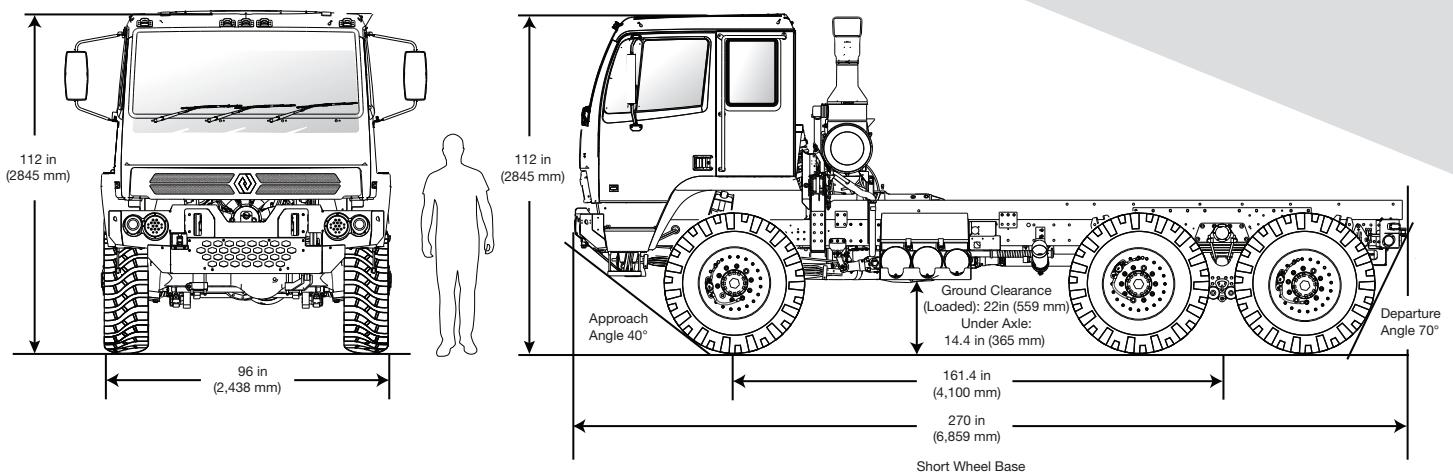

VEHICLE SPECIFICATIONS

Dimensional Data

Width	96 in	(2,438 mm)
Height	112 in	(2,845 mm)
Pintle Height (Laden/Unladen)	33/36 in	(838/905 mm)
Length	270 in	(6,859 mm)
Wheelbase	161 in	(4,100 mm)
Cab to Axle ¹	115.5 in	(2,934 mm)
Turning Radius	56.4 f.	(17.2 m)
Ground Clearance		
Loaded	22 in	(559 mm)
Under Axle	14.4 in	(365 mm)
Approach/Departure Angles*	40° / 70°	
Curb Weight (with Fuel)*	18,446 lb	(8,915 kg)
GVWR*	30,750-44,650 lb	(13,948-22,226 kg)
Payload*	12,304-30,000 lb	(5,581-13,607 kg)
Maximum Towed Load	21,000 lb	(9,526 kg)
Maximum Speed	58 MPH	(93 km/h)
<small>(Standard Gearing)</small>		
Maximum Speed	74 MPH	(119 km/h)
<small>(Optional High Speed Gearing)</small>		
Fuel Tank	58 gal	(220 L)
Range	400+ mi	(645+ km)
Maximum Grade/Side Slope	60% / 30%	

Axles, Meritor RF-611 Series

Front	14,700 lb	(6,667 kg) GAWR
Intermediate	18,000 lb	(8,165) kg GAWR
Rear	18,000 lb	(8,165) kg GAWR
Locker	Automatic, Detroit Style, Intermediate Axle	
Carrier	Single Reduction, Amboid-Gearing Bevel	
Wheel End	Wheel End Reduction, Ratio 2:1	
Final Gear Ratio	Standard: 7.80:1	
<small>Optional 6.14:1 Available</small>		
Front Axle Steering Angle	35°	

Steering

Power Assisted, Recirculating Ball, Adjustable Tilt Wheel

Suspension

Parabolic-Tapered Leaf Springs with Hydraulic Twin-Tube Shock Absorbers

Brakes

Primary Dual-Circuit, Four Channel Air, Anti-Lock Braking System (ABS)

Supplemental

Air Actuated, Driver-Controlled Exhaust "Jake" Brake

Tires

46.6 in Military Tires 395/85-R20

Spare

Rack-Mounted, Hydraulic Lift

Central Tire Inflation System (CTIS) (Optional)

General

Cab-Mounted Electronic Controls, Operable While Driving in Highway, Cross-Country, Sand/Mud/Snow, and Emergency Modes

Pressure Range

17-90 PSI (1.1-6.6 Bar)

Electrical System

Dual Voltage, 12/24VDC, Central Power Distribution Panel

Alternator

24V/185A Alternator, 24V-12V/50A Converter/Battery Charge Controller
*12V/100A Optionally Available

Starter

24 VDC, Waterproof

Batteries

(4) 6TL Commercial Batteries, 3000 CCA, 480 CA (combined)

Cab

General

Extended Cab-Over Design

Trim

Commercial-Grade Trim Package, Heavy-Duty Heat and Sound Insulation

Entertainment

AM/FM/XM Compatible 6.2" Touchscreen Stereo

Power

(2) 2.1A USB Power Ports, (1) 12VDC Cig. Style Plug

Seating

2-Person, Adjustable, High-Back, Air-Ride Seats (3-Person Optional)

Mechanical Access

Electric/Hydraulic Tilt

HVAC

47,000 BTU/Hr (13.8 kw) Heating Capacity
29,900 BTU/Hr (8.8 kw) Cooling Capacity
Airflow 334 SCFM 9.5 m³/min

*Model Dependant

¹ Measured From Aft Lateral Frame Support To Center of Rear Axles

EQUIPMENT SPECIFICATIONS

Engine

Caterpillar 3126 / C7*	6-Cylinder, 7.2 L, Electronically Controlled, Fuel-Injected, Turbocharged and Aftercooled, EPA Certified
Rating	330 HP (246 kW) @ 2400 RPM
Displacement	441 cu in (7.2 L)
Torque	860 ft-lb (1,166 Nm) @ 1440 RPM
Fuel Type	Diesel
Lubricant	15W40, Synthetic Blend

Transmission

Allison MD 3700/3070SP	Automatic, 7-speed, Electronically-Controlled, Power Take Off
Full-Time AWD	Integral Transfer Case
Torque Split	Normal Operations: 30% Front / 70% Rear Off-Road Mode: 50% Front / 50% Rear
Lubricant	ATF, 31.8 qt (30 L)

Acela Truck Company

1-800-940-0508

info@acelatruck.com

This document gives only a general description of the product(s) or services and except where expressly provided otherwise shall not form part of any contract. From time to time, changes may be made in the products or the conditions of supply. Acela Truck Company reserves the right to change product specifications without prior notice. Photos, descriptions and/or drawings may represent optional equipment. All Rights Reserved.

