


# AMPLIROLL<sup>®</sup> HOOKLIFT SYSTEMS

616-863-9155 | equipment@amplirollusa.com | amplirollusa.com

# 13,000 POUNDS

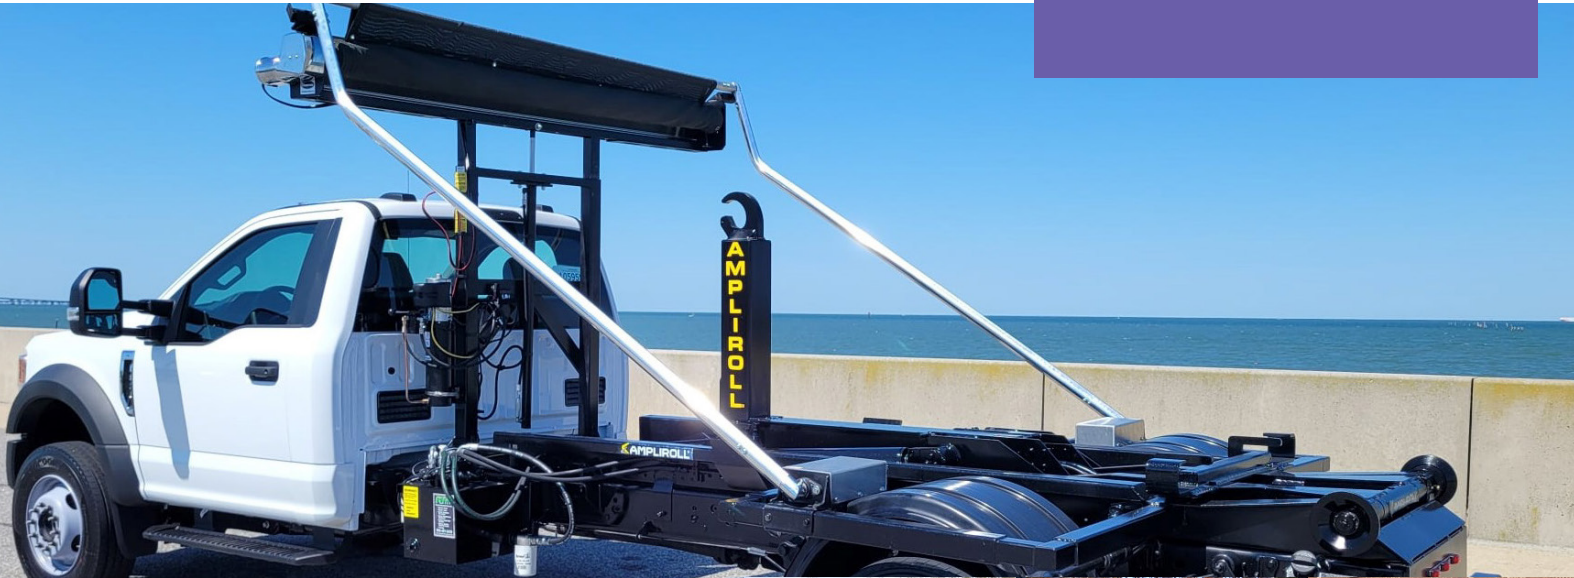

## WHY BUY A HOOKLIFT?

Do you have trucks that are not always being used?

Do you have a difficult time finding quality drivers?

Is there a piece of equipment you could use, but can't justify adding another truck?

**It's Multi-tasking for your truck.  
The possibilities are Infinite.**

## DELIVER | LOAD | DUMP

The **Ampliroll Hooklift** was invented in 1969. Our process of laser cutting and robotic welding enables us to provide you with a complete line of hooklifts, that eliminate the use of SHIMS and WEAR PADS.



## FEATURES:

- **Sliding Jib** gives you greater range of body lengths and optimal weight distribution.
- **Twin Pivot** allows you to dump a uniform pile of material.
- **Dual Cylinders** gives greater stability while dumping and loading.
- **Safely operated** from the drivers seat.
- **Dock Level** loading and unloading
- **Double your payload** by pulling another body on a trailer.
- **Maneuverable** to operate, the container can be loaded within a 60 degree arc.
- **Spot** the container exactly where you want it, by pushing it into place with no damage.
- **Quickly loads** a body in less than one minute.
- **Investment** that will outlast your truck, Amplirolls<sup>®</sup> will last over 25 years.
- **Meets** all highway safety standards.

**LIFTING CAPACITY**  
(including container)

**AL 90S-12**

13,000 lbs.

**AL 90L-14**

13,000 lbs.

**SHIPPING WEIGHT**

1790 lbs.

1790 lbs.

**DUMP ANGLE**

58°

61°

**CAB TO AXLE\***

84" - 108"

108" - 126"

**OVER ALL LENGTH**  
From Hook\*\*

124"

144"

**BODY LENGTH**

9' - 13.5'

10' - 14'

**HOOK HEIGHT**

**Standard**  
36"

**Optional**  
54" (Reduces capacity to 10,000 lbs.)

**STEEL: SPECIAL ALLOY**

**ASTM A 514**

in jib, central arm and tilting frame

**ASTM A 572**

grade 60 type 2 subframe

**HYDRAULIC SPECIFICATIONS:**

**Pump**

Axial piston, 5,700 psi, 7 GPM @ 1,200 RPM,  
Standard - SAE 7/8th Shaft

**Controls**

Electric in cab or cable

**Reservoir**

7 gallons

**Filter**

10 micron, return line with replaceable  
cartridge

**Maximum operating pressure**

4,800 psi

**Hoses, tubes & fittings**

all JIC/SAE specifications

**SAFETY DEVICES:**

**Counter-balance valve**

to hold cylinder if hose breaks

**Hoist automatically locks**

into dump mode when container in  
locked into holddowns.

**TRUCK REQUIREMENTS:**

**GVWR**

15,000 to 20,000 lbs

**NOTICE:**

Longer containers may not comply with I.C.C. bumper regulations and can effect dump angle.

\*Need to confirm CA or CT with factory or local dealer for proper installation.

\*\*Some subframes are longer, check with local dealer.



4750 14 Mile Road NE | Rockford, MI 49341  
Phone: 616-863-9155  
Fax: 616-863-9177  
Toll Free: 866-822-3580  
equipment@amplirollusa.com  
amplirollusa.com

Distributed by:

