

NEW

EXCAVATOR MULCHERS

BL2/EX/VT



from 26 to 37 gal/min



Ø 6 in max



from 8 to 14 t

LIGHT AND COMPACT
PERFECT FOR MIDSIZE EXCAVATORS


FORESTRY MULCHER WITH BITE LIMITER TECHNOLOGY.

Special steel profiles limit the depth of blade action, reducing the demand for power, guaranteeing speed and exceptional performance. The BL2/EX/VT, designed for excavators from 8 to 14 t will mulch logs up to inches in diameter. It has a hydraulic piston motor with VT (variable torque) automatic displacement, significantly improving performance, increasing torque when necessary, and minimizing rotor stalling conditions. The BL2/EX/VT has a rotor equipped with a heat-treated forged steel tooth holder, together with Type E reversible blades, and a standard hydraulic front hood. The hydraulic thumb is one of the available options, useful in managing and moving the material to be mulched to the ground.


STANDARD EQUIPMENT
55/38cc variable torque hydraulic piston motor - (26 - 37 gal/min)
Flow control system valve
Diverter valve (plug in and play)
Safety and anticavitation valve
Motor enclosed in the frame
Belt transmission
Bulkhead for hydraulic connections
Hydraulic front hood
Bite Limiter rotor

OPTIONS
Dedicated rear hood (deflector)
Front fixed thumb bracked
Hydraulic thumb
Customized attachment bracket with pins
Attachment plate with self levelling device
Multiple tooth options

FEATURES

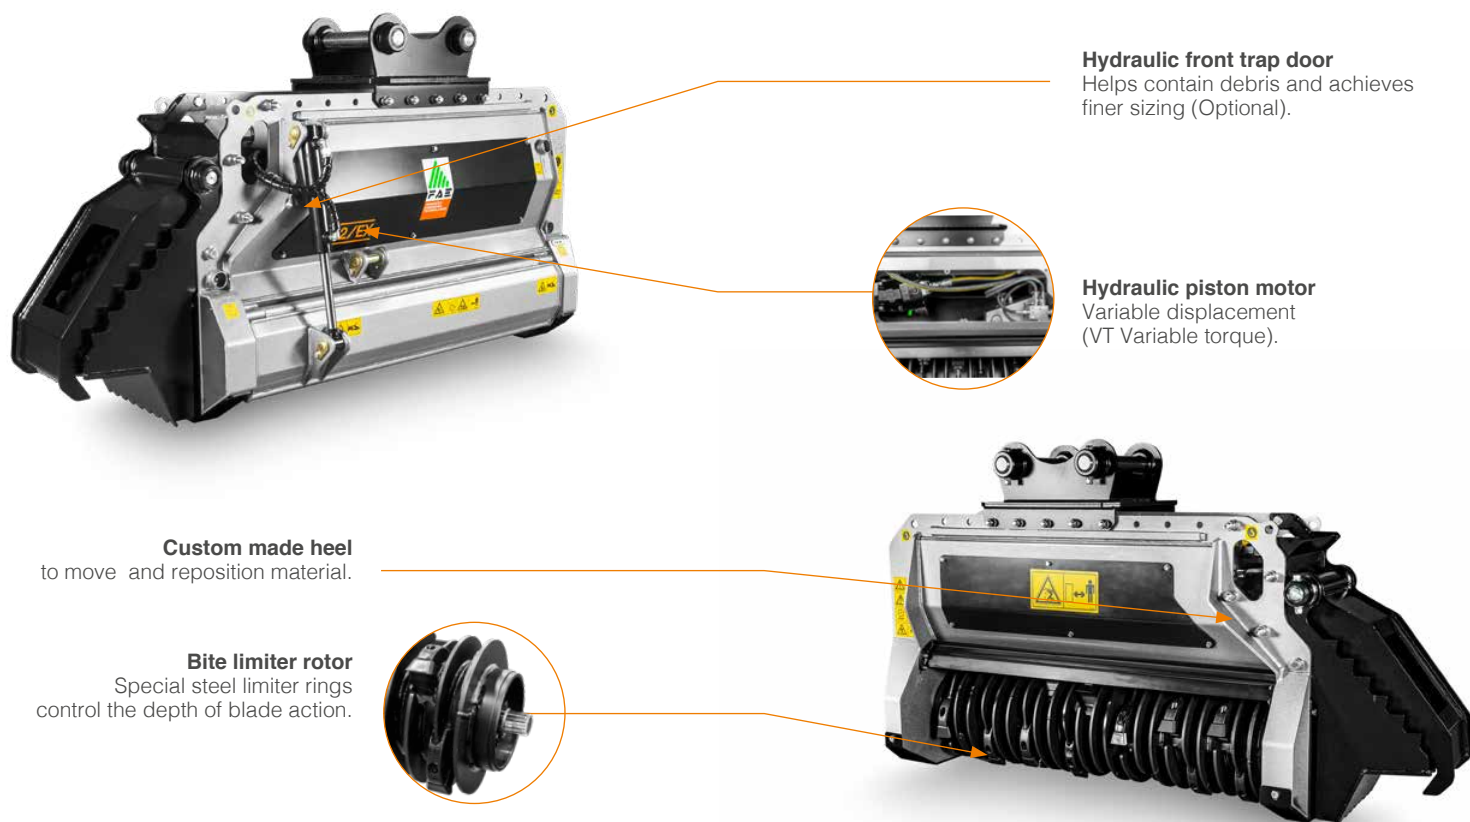

MAIN OPTIONS

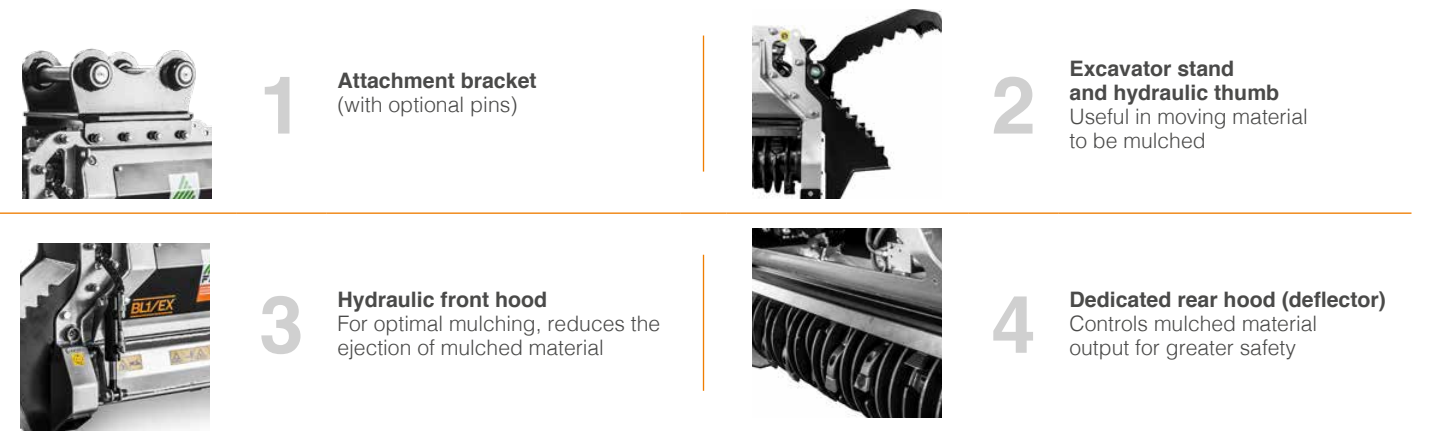

MODEL	Flow rate (gal/min)		Pressure (PSI)		Excavator weight (t.)		Working width (in)	Weight (lbs)	Max shredding diameter (in)	No. teeth E
	min	max	min	max	min	max				
BL2/EX/VT 100	26	37	2611	5076	8	14	39	1257	6	18
BL2/EX/VT 125	26	37	2611	5076	8	14	49	1378	6	22

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.